


ERV1500-ECP

Technical Data

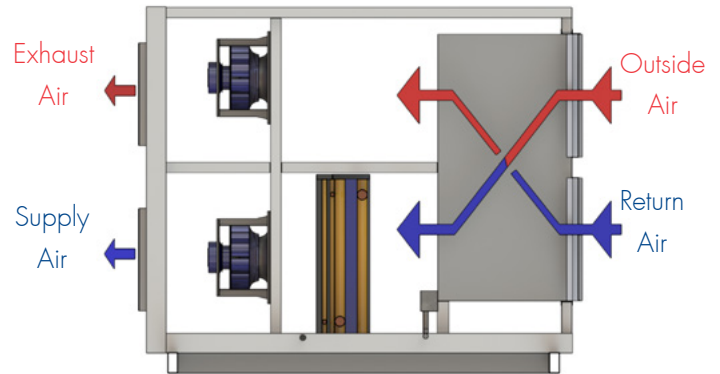

Contact your Air Change representative for a psychrometric unit selection

Airflow

Supply Air	1500l/s (nominal)
Exhaust Air	1500l/s (nominal)
Outside Air	100%

Air-to-Air Heat Exchanger*

HEX Type	Counterflow Plate
HEX Media	Sensible-only or Enthalpy

CHW Coil (Optional)

Design	As per project requirements
--------	-----------------------------

Protective Coating

Design	Epoxy
--------	-------

HHW Coil (Optional)

Design	As per project requirements
--------	-----------------------------

Fans (Nominal Selection)

Type	EC Plug
------	---------

Supply Air

Total Fans	x1
Nominal Power	2.4kW ea.
Fan Diameter	400mm
Fan Speed (max.)	2400RPM
Motor Efficiency Class	IE4
Ingress Protection Class	IP54
Impeller Construction	Non-metallic Composite
Speed Control	Integrated Constant Volume Control or via External Speed Signal

Fans (Nominal Selection)

Type	EC Plug
Total Fans	x1
Nominal Power	2.4kW ea.
Fan Diameter	400mm
Fan Speed (max.)	2400RPM
Motor Efficiency Class	IE4
Ingress Protection Class	IP54
Impeller Construction	Non-metallic Composite
Speed Control	Integrated Constant Volume Control or via External Speed Signal

Exhaust Air

Cabinet

Weatherproof	Yes
Panel Construction	50mm PIR Sandwich Panel (FM Approved 4880/4881 - Class 1)
Panel Finish	Colorbond "Surfmist"
Panel R-Value	2.63K.m ² /W
Panel Joiner Material	UV Resistant Polymer
Base Frame	Galvanised Steel with Lifting Lugs
Anti-corrosion Treatment	Optional
Filter Section	Not included (filters to be mounted in RA & OA ductwork)


Operating Modes

Energy Recovery	Default
Economy Cycle	HEX Bypass for Free Cooling (optional)
Return Air Bypass	HEX Bypass for Recirculation (optional)


* The plate heat exchangers are designed to operate to a maximum 300Pa pressure differential (inlet condition) between primary and secondary air streams.

ERV1500-ECP Dimensions

Dimensions (without Economy Cycle Option)*

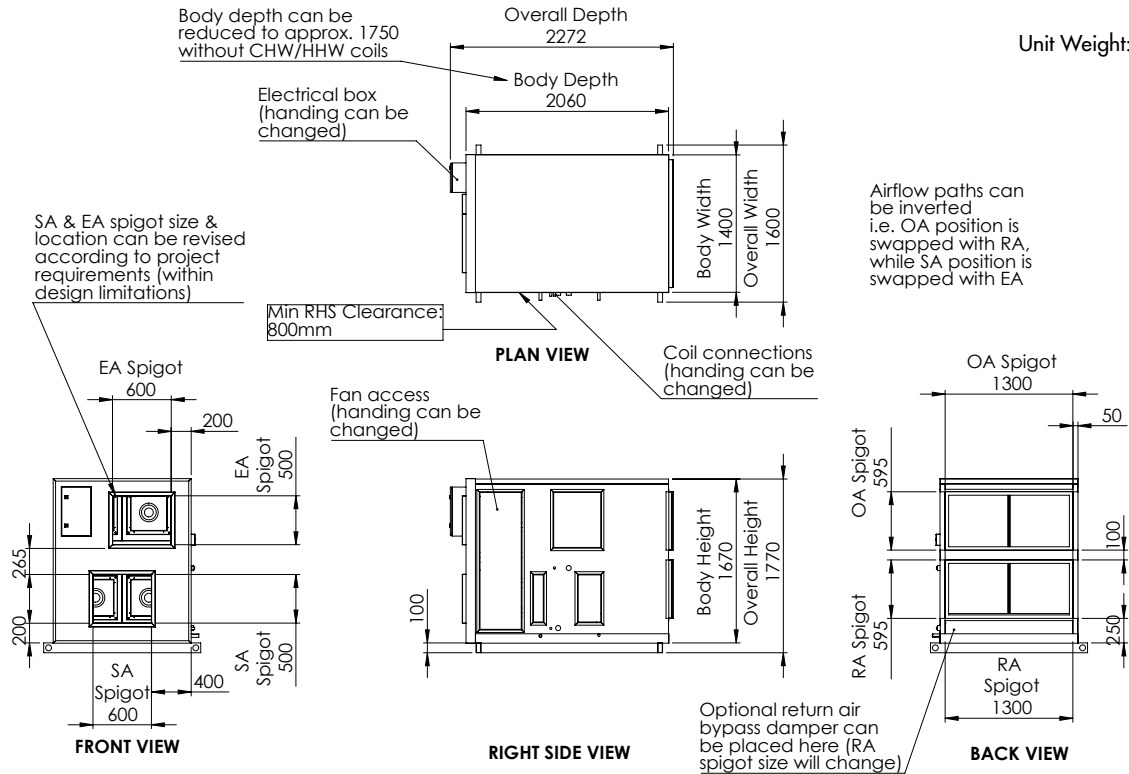


Dimensions (with Economy Cycle Option)*

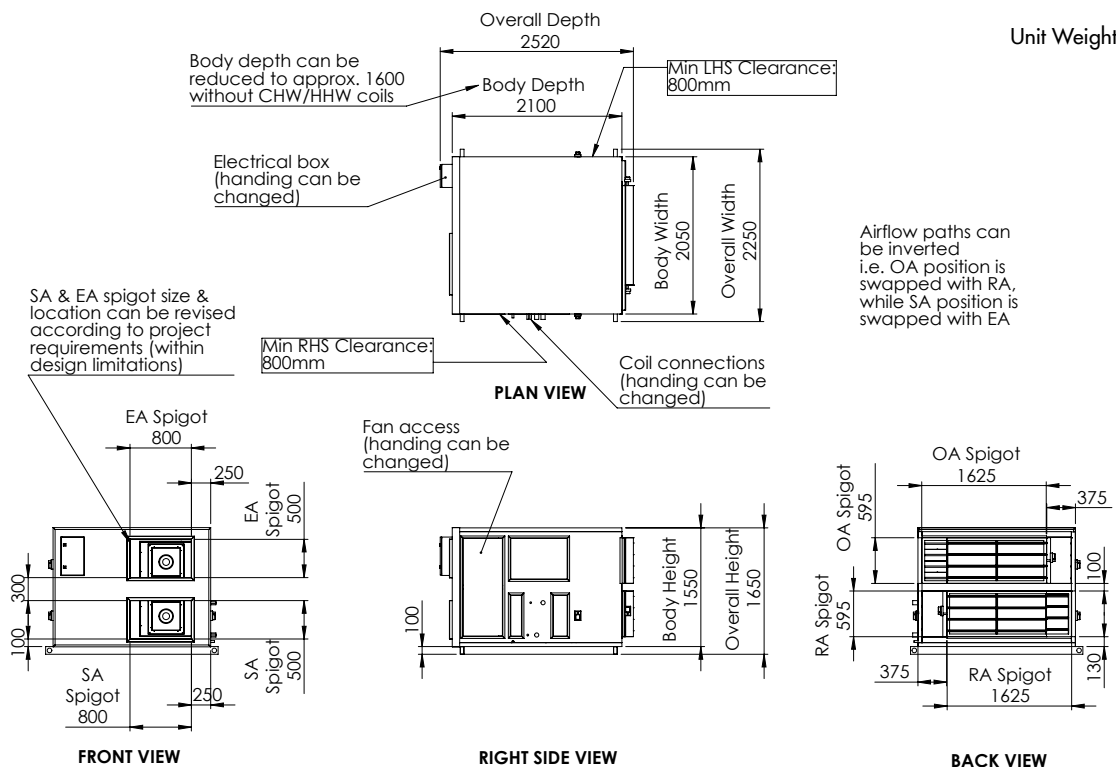


* Dimensions and weight are subject to change, depending on project requirements. Refer to project certified drawings for finalised details.

ERV1500-ECP Electrical

Wiring Diagram (without Economy Cycle and Return Air Bypass Modes)*

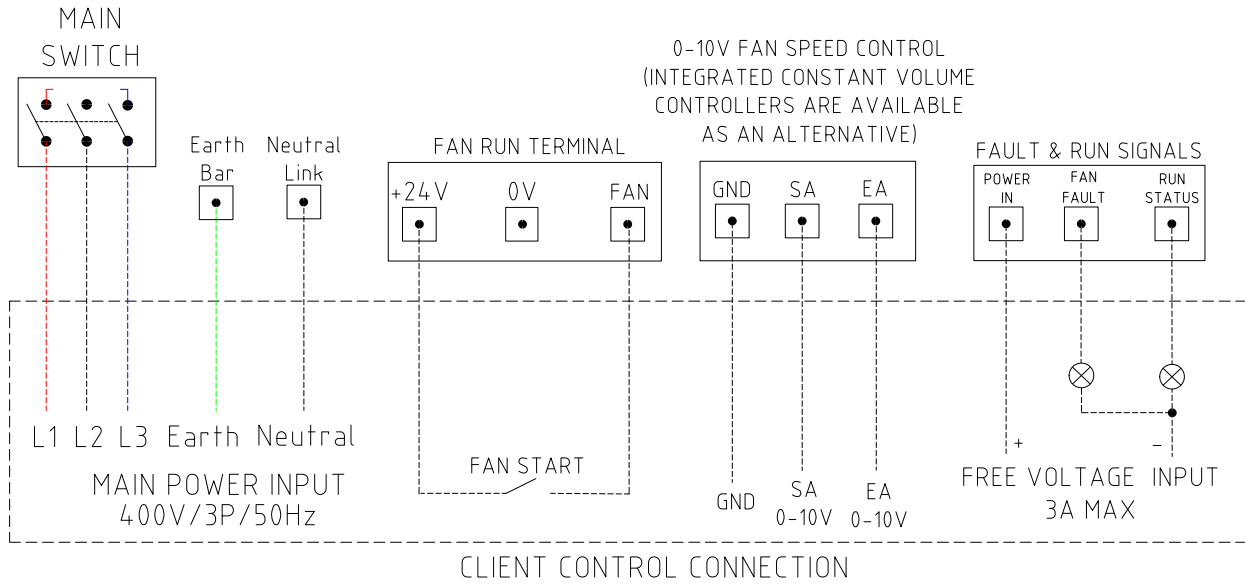

Wiring Diagram (with Economy Cycle and Return Air Bypass Modes)*

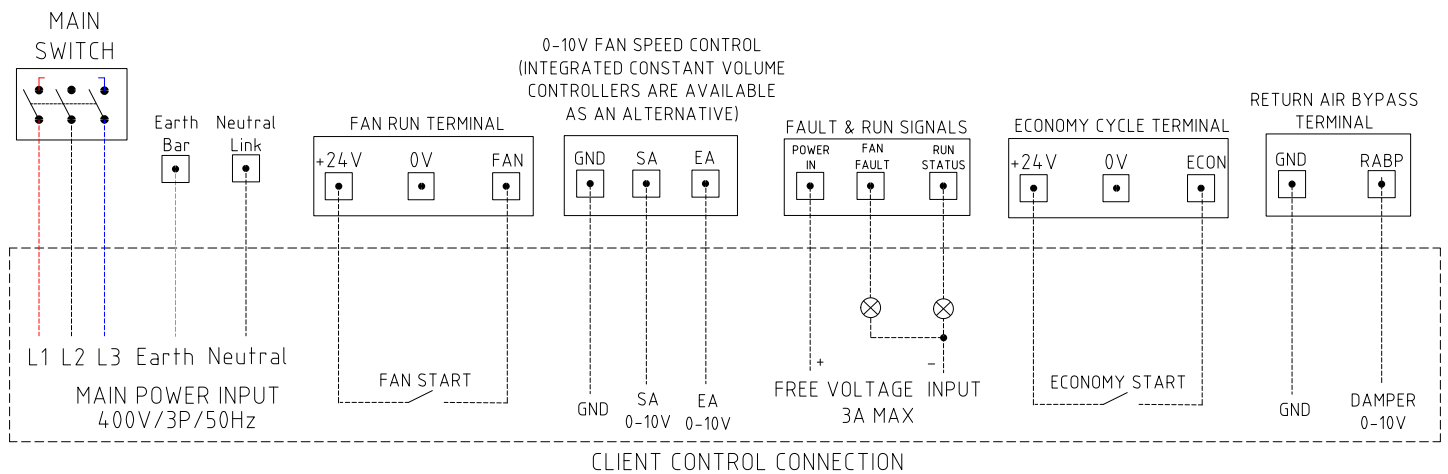

Electrical Input †

Voltage / Phases / Frequency	415V / 3ph / 50Hz
Full Load Amps	9A


* Connection details are subject to change, depending on project requirements. Refer to project certified electrical diagrams for finalised details.

† Unit electrical input is subject to change, depending on project requirements. Refer to project certified electrical diagrams for finalised details.

ERV1500-ECP Airflow & Noise



Supply Air Fan Curve*

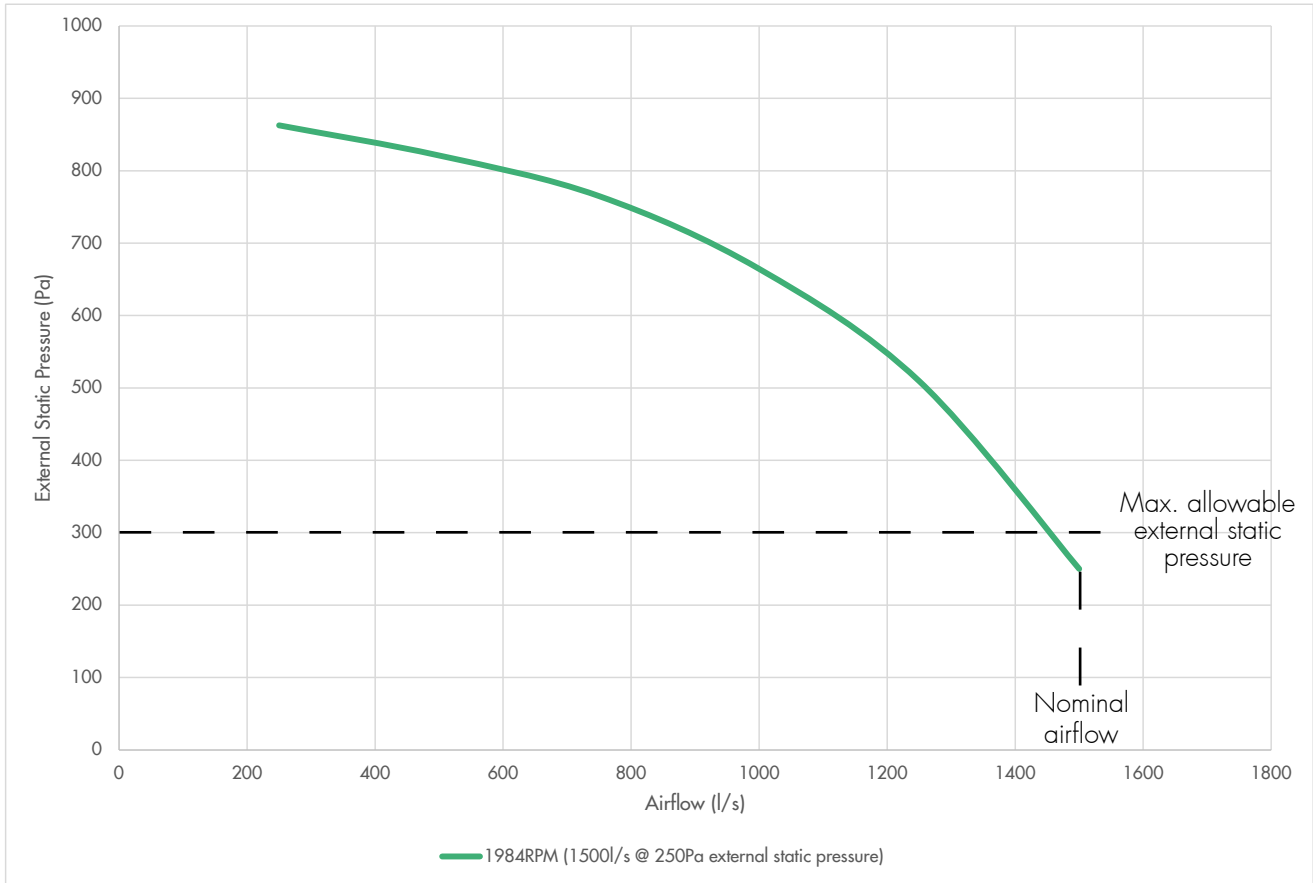

Supply Air Fan Power (1500l/s @ 250Pa External Static Pressure)*	
Absorbed Power	1.25kW

* Fan curve makes allowance for internal pressure drop of unit (incl. CHW & HHW coils). This pressure drop is subject to change, depending on project requirements. Supply air fan selection options are available.



Supply Air Fan Acoustics (Sound Power)†


1500l/s @ 250 Pa External Static Pressure									
Inlet									
Frequency (Hz)	sum	63	125	250	500	1000	2000	4000	8000
A-weighted (dB)	75	40	48	65	69	66	67	65	69
Non A-weighted (dB)	78	65	64	74	73	66	66	65	70
Outlet									
Frequency (Hz)	sum	63	125	250	500	1000	2000	4000	8000
A-weighted (dB)	81	43	52	70	74	77	74	71	72
Non A-weighted (dB)	84	68	67	79	77	77	73	70	72

† Noise data considers supply air fans only, without attenuation by the cabinet.

ERV1500-ECP Airflow & Noise



Exhaust Air Fan Curve*

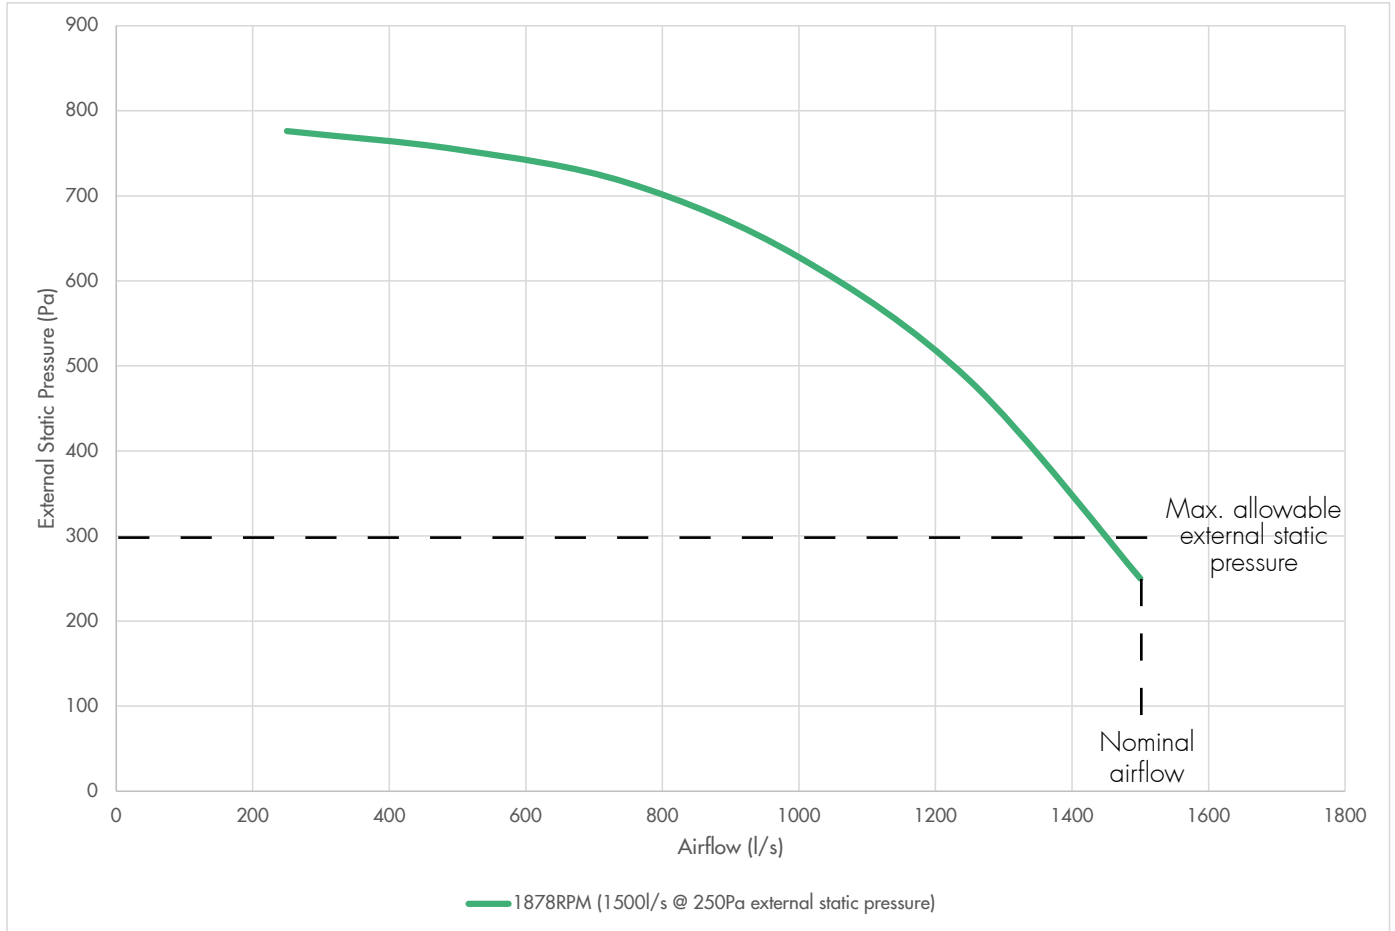

Exhaust Air Fan Power (1500l/s @ 250Pa External Static Pressure)*	
Absorbed Power	1.01kW

* Fan curve makes allowance for internal pressure drop of unit. This pressure drop is subject to change, depending on project requirements. Exhaust air fan selection options are available.



Exhaust Air Fan Acoustics (Sound Power)†

1500l/s @ 250 Pa External Static Pressure									
Inlet									
Frequency (Hz)	sum	63	125	250	500	1000	2000	4000	8000
A-weighted (dB)	75	41	52	64	69	66	67	66	69
Non A-weighted (dB)	78	67	67	73	72	66	66	65	70
Outlet									
Frequency (Hz)	sum	63	125	250	500	1000	2000	4000	8000
A-weighted (dB)	81	43	55	69	73	77	73	71	72
Non A-weighted (dB)	83	68	70	78	76	77	72	70	72

† Noise data considers exhaust air fans only, without attenuation by the cabinet.