


NAP Gas Turbine Exhaust Silencers


NAP Silentflo's wide experience in the design and manufacture of a comprehensive range of industrial silencers enables the Group to offer a comprehensive selection of gas turbine exhaust silencers.

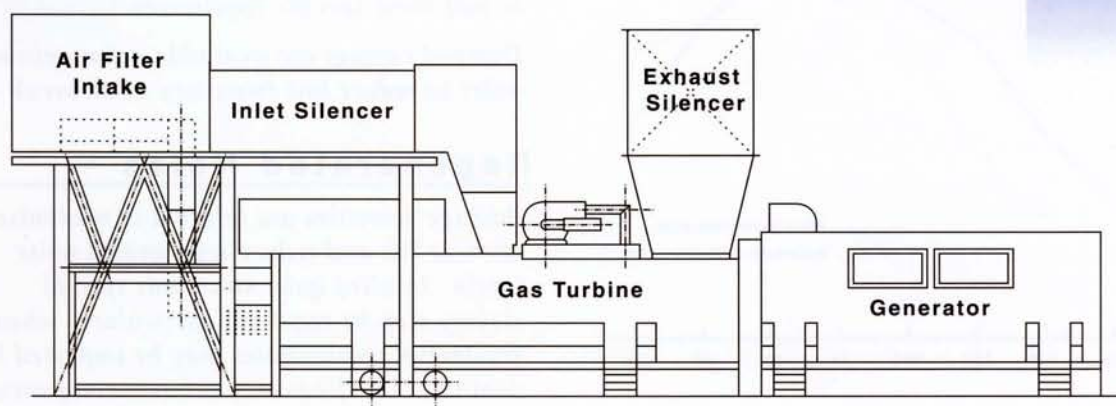

- Designs available to suit all types of turbines.
- Rectangular or circular cross section.
- Robust fully welded case in high temperature, weather resistant steels, boiler plate or stainless steel.
- Internal absorption with glass cloth and stainless steel mesh protection.
- Stainless steel perforated sheet in 1.6mm to 3.0mm thicknesses, available in a variety of stainless steel.
- Vertical or Horizontal orientation, to suit project requirements.
- Standard finish in multicoat high temperature paint system or hot metal spray plus silicone sealer (total DFT 200 microns).
- Can be designed to achieve a range of noise criteria, including 85 dB(A) at 1 metre, or, for example, community criteria such as NR55 at 100 metres.
- Designed for lifetime operation of prime power units.


Applications

- Prime Power Generation
- Gas Drive Compressor Stations
- Pumping Stations
- Peak lopping generators
- Petrochemical installations
- Process and chemical plants
- Offshore Platform installations
- LNG Plants
- Standby generating units

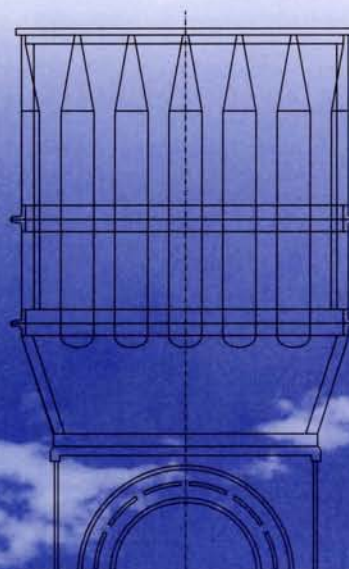

NAP Gas Turbine Exhaust Silencers

Typical IL Values

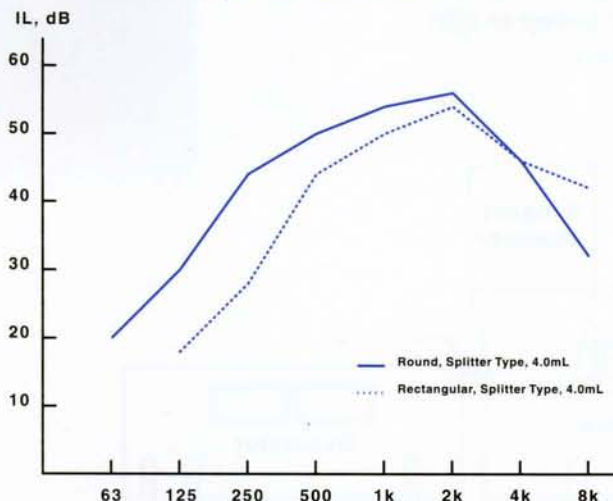

Pressure Drop

Normally less than 0.5kPa. Will vary according to entry conditions, installation and other specific site factors. Transitions, stacks and rain hoods will also affect the total pressure loss.

NAP Silentflo silencers are available in a range of configurations to suit individual requirements. NAP Silentflo Gas Turbine Exhaust Silencers have been supplied to all major manufacturers, including Solar, GEC Alstom, Rustons, Allison, Hitachi, Nuovo Pignone, Rolls Royce and all major manufacturers.

Performance

Will vary from application to application and according to turbine type and client specification. Each project is purpose designed to suit these specific requirements.

Damped casings are available as an option in order to reduce low frequency noise break out.

Regenerated Noise

Passage velocities are selected to maximise silencer life and reduce regenerated noise levels. In ultra quiet situations special sizings may be required, particularly when residential communities may be impacted by dominant low frequency exhaust components of the sound.

NAP Silentflo Gas Turbine Exhaust Silencers

- Proven
- Durable
- Reliable
- Widest Reference List

For further details on specific projects and for details on our extensive range of Gas Turbine Silencers, please contact NAP Silentflo.

NAP SILENTFLO
THE EXPERTS IN NOISE CONTROL

ABN 13 071 443 886

www.nap.com.au

Melbourne

12A Bricker Street
Cheltenham, Vic. 3192
Phone: (03) 9555 9511
Fax: (03) 9555 7611

Sydney

3/84 Great North Road
Five Dock, N.S.W. 2046
Phone: (02) 9712 0722
Fax: (02) 9712 0822

Represented by:



COOKE INDUSTRIES

Auckland (Head Office)
31 Station Road, Penrose, Auckland, NZ
PO Box 12021, Penrose, Auckland 1642
Ph: +64-9-579 2185 Fax: +64-9-579 2181

Web: www.cookeindustries.co.nz

Christchurch (Branch Office)
Level 3, 161 Kilmore Street, Christchurch, NZ
PO Box 13516, Armagh, Christchurch 8141
Ph: +64-3-379 7884 Fax: +64-3-379 7874

Email: sales@cookeindustries.co.nz

Every care has been taken to ensure that the information in this brochure is correct at the time of going to press, however no warranties or representations are given or implied. NAP's policy is one of continual development and improvement of its products, and the right is reserved to make any alterations in designer manufacture without notice.